




SIDE VIEW

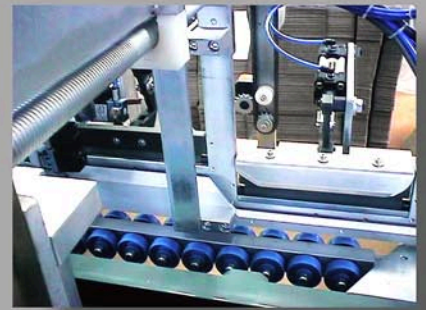

COLUMN FOLDER

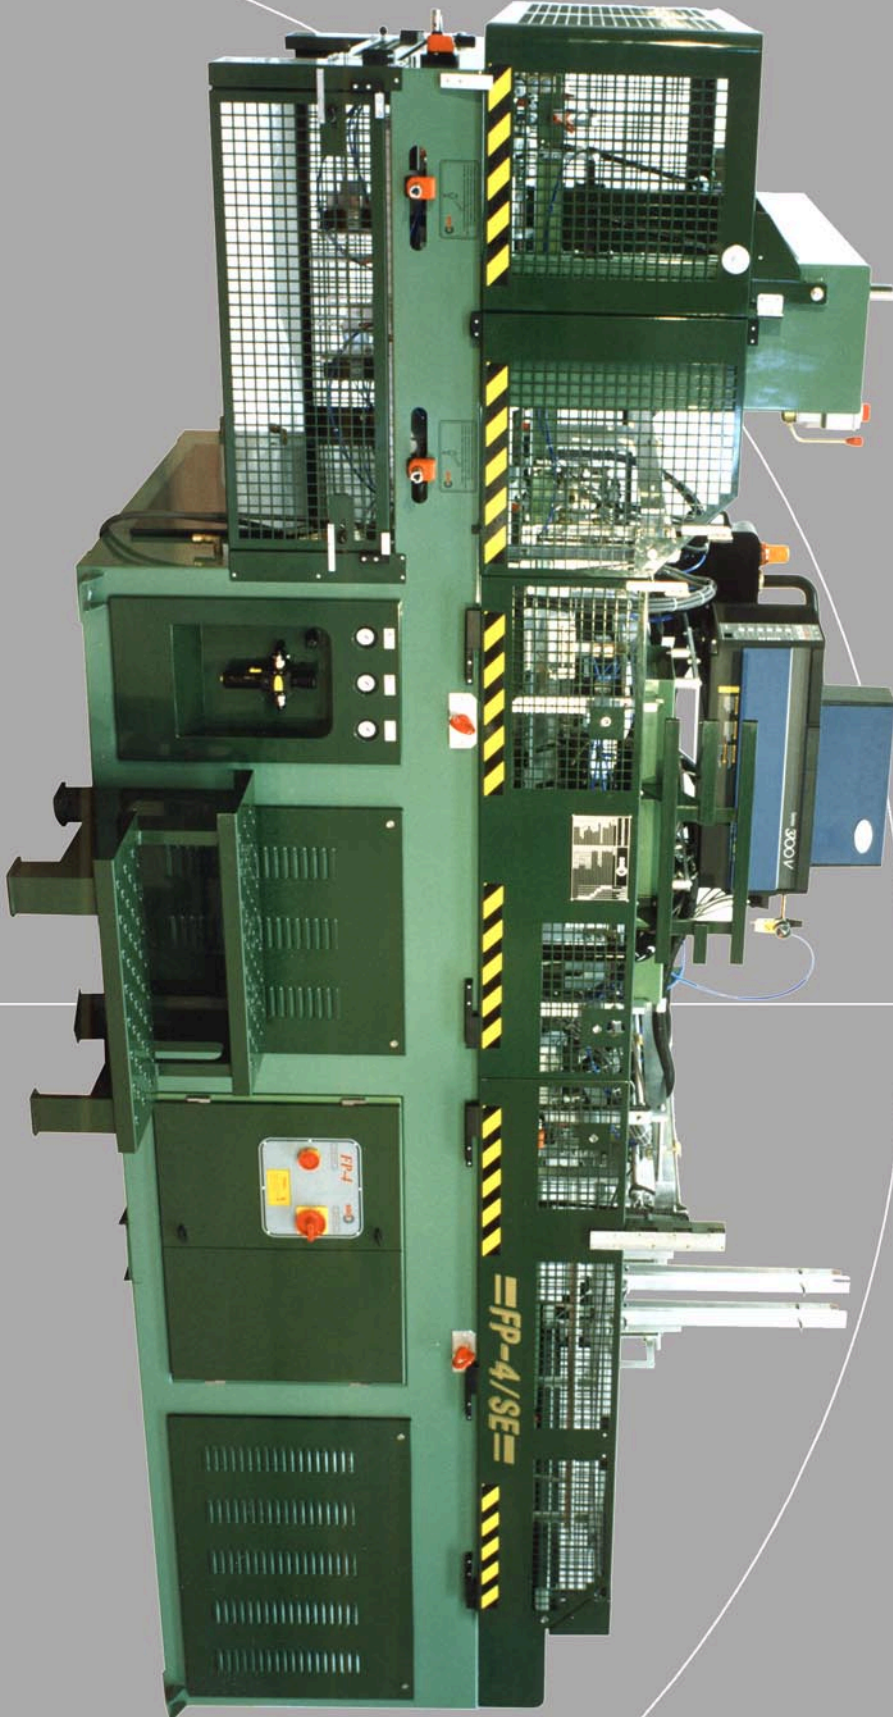

MOULD AREA

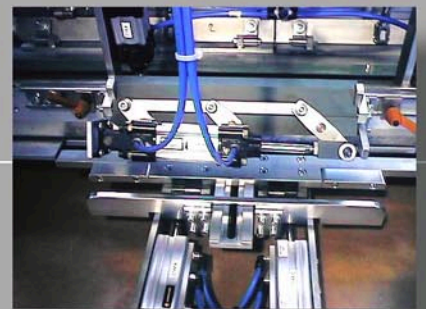

DOUBLE WALL FOLDER



PROGRAMMER NT11 WITH MEMORY FOR 8 BOXES



CONTROL PANEL WITH PROGRAMMER NT30 WITH MEMORY FOR 80 BOXES

Handelsonderneming Versleijen BV

Kerkvaart 1
3641 EN Mijdrecht
Holland
Tel. +31 297-288506
Fax. +31 297-288497
E-mail: info@versleijen.nl
Web: www.versleijen.nl

FP-4


AUTOMATIC AND ADJUSTABLE MACHINE FOR GLUING AND FORMING OPEN TOP TRAYS IN CORRUGATED CARTON OF DISTINCT GRAMMAGES AND COMBINATIONS, WITH COLUMNS FOR INCREASED STACKING STRENGTH.

TABLE OF MODELS

FP-4						PROGRAMADOR NT-30	
	A						
	B						
	C						
	D						
E							
FP-4						PROGRAMADOR NT-30	
	SA						
	SB						
	SC						
	SD						
SE							

TECHNICAL SPECIFICATIONS	A	B	C	D	E	SA	SB	SC	SD	SE
OPERATION	Mechanic, pneumatic and electric									
GLUE SYSTEM	By injection, hot melt. Nordson (cap. 14 kg.)									
PRODUCTION	4 speeds from 900 to 1400 boxes/hour. Speed variator.									
TOTAL POWER	7 Kw. machine			0,6 Kw. stacker			4 Kw. compressor			
ELECTRICAL SUPPLY STANDARD	380 v. (3P + N + E) - 50 Hz									
NET WEIGHT - kg.	2.300	2.330	2.510	2.600	2.600	2.540	2.570	2.750	2.840	2.840
BLANK FEEDING SYSTEM	By vacuum									
SIZE CHANGE	15 30 min.									
DESIGN CHANGE	30 120 min.									
AIR CONSUMPTION - l/min.	180	195	205	230	230	180	195	205	230	230
WORKING AIR PRESSURE	6 bar									

DIMENSIONS (mm):

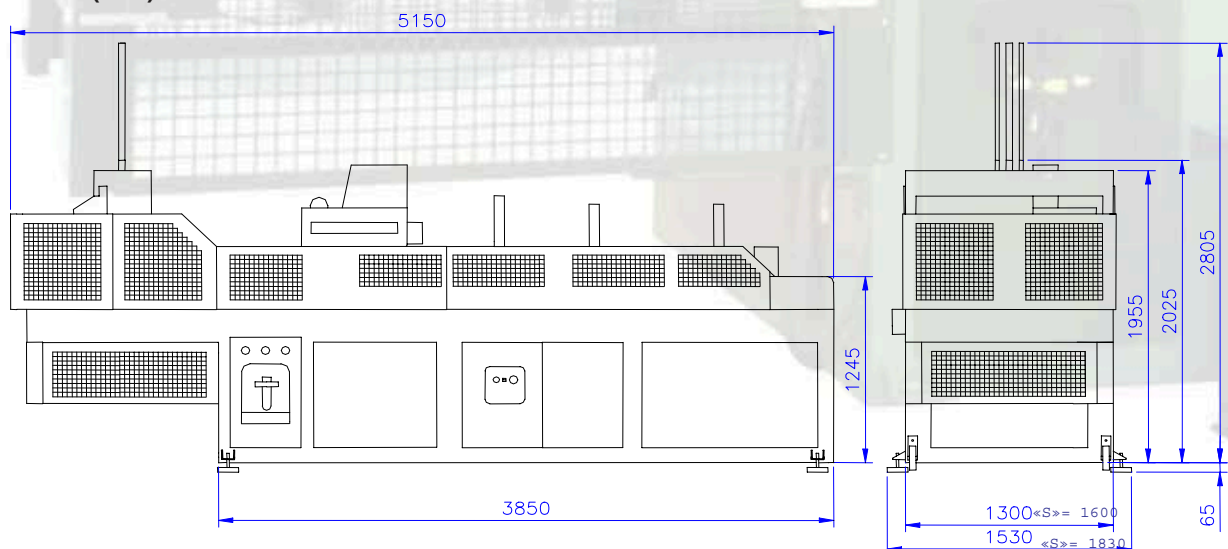

TOTAL LENGTH WITH THE STACKERS;

AMP	→	L = 6.900 mm.	AMP/R	→	L = 7.100 mm.
AMB	→	L = 7.600 mm.	ACR	→	L = 8.000 mm.